

The Veritas® P724 Plumb Bob comes in a storage cup that has an integral magnet to protect the plumb bob's stainless-steel tip while it is not in use. The O-ring around the plumb bob's body serves to prevent damage to the plumb bob and adjacent surfaces.

The P724 plumb bob requires some assembly before it can be used.

Remove the plumb bob from its storage cup and unscrew the top cap. Thread one end of the string through the hole in the cap and tie a tight double knot in the end of the string, as shown in **Figure 1**. Trim the free end of the string so that there is no more than $\frac{1}{8}$ " of string past the knot. Pull the knot tight up into the cap and re-install the cap on the bob.

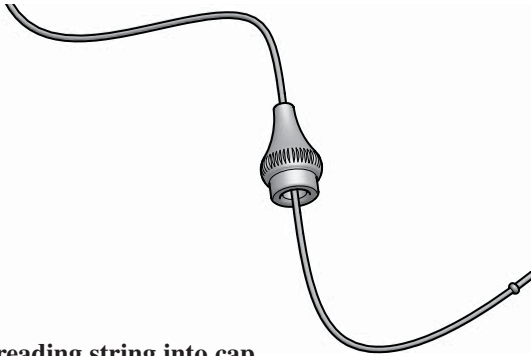


Figure 1: Threading string into cap.

Unroll the entire string from its cardboard spool and thread the free end of the string through the hole in the side of the storage cup. This can be a bit tricky; you may need tweezers to grab the end of the string. Tie another double knot in the end of the string as shown in **Figure 2**, then trim the end and pull it tight.

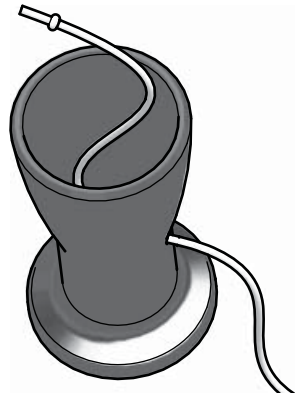


Figure 2: Threading string into cup.

Wrap the string around the stem of the storage cup and replace the plumb bob in the cup. The P724 plumb bob is now ready to use.

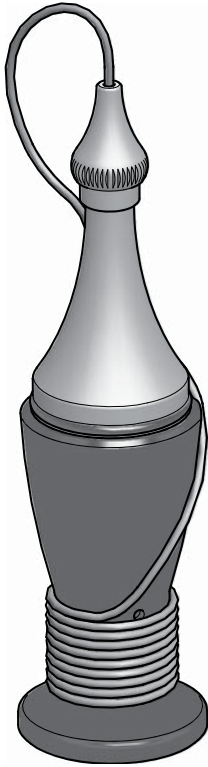


Figure 3: Ready for use.

veritas[®] Tools Inc.

814 Proctor Avenue 1090 Morrison Drive
Ogdensburg NY 13669-2205 Ottawa ON K2H 1C2
United States Canada

customerservice@veritastools.com
www.veritastools.com